


# 六角袋ナット

Domed cap nuts

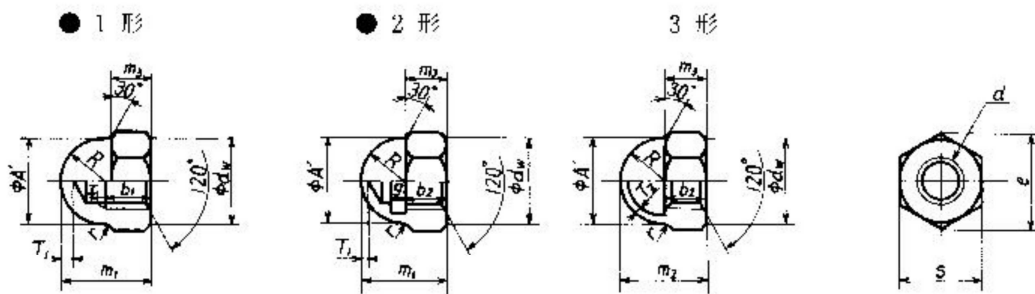

単位MM

ねじの呼び (d)	m <sub>1</sub>		m <sub>2</sub>		m <sub>3</sub>		A'	T <sub>1</sub>	T <sub>2</sub>	R	r	S	
	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差	最小	最小	最小	約	約		
六角袋ナット	M 4	9.5	±0.25	6.2	±0.25	3.2	0/-0.3	5.6	0.5	0.6	3	0.5	7
	M 5	11		7.5		4		6.6	0.5	0.6	3.5		8
	M 6	12		9.5		5		8.5	0.5	0.6	4.5		10
	M 8	15	±0.3	12.5	±0.3	6.5	0/-0.6	11.5	0.5	0.8	6.5	1	13
	M 10	18		15.5		8		14.5	0.5	1	7.5		17
	M 12	22		18.5		10		16.5	1	1.2	8		19
	(M 14)	24		21		11		19.5	1	1.6	10		22
	M 16	28	±0.4	24	±0.4	13	0/-0.43	21.5	1	1.6	11	1	24
	(M 18)	31		27		15		23.5	1	1.6	12		27
	M 20	34		29		16		26.5	1	2	13.5		30
	(M 22)	38		32.5		18		28.5	1	2	14.5		32
	M 24	41		35.5		19		32.5	1	2	16.5		36
	● (M 27)	46	±0.5	41	±0.5	22	0/-0.52	37.5	1	2	19	1.5	41
	● M 30	50		45		24		41.5	1	2	21		46
● (M 33)	54	49		26		45.5		1	2	23	50		
● M 36	59	54.5		29		50.5		1	2	25.5	55		
● (M 33)	64	59		31		55.5		1	2	28	60		
●小六角ナット	M 8	15	±0.3	12	±0.3	6.5	0/-0.36	10.5	0.5	0.6	5.5	0.5	12
	M 10	18		14.5		8		12.5	0.5	0.8	6.5		14
	M 12	22		17.5		10		14.5	0.5	1	7.5		17
	(M 14)	23.4		19.5		11		16.5	1	1.2	8.5		19
	M 16	28	±0.4	23	±0.4	13	0/-0.43	19.5	1	1.6	10	1.0	22
	(M 18)	31		26		15		21.5	1	1.6	11		24
	M 20	34		26		16		23.5	1	1.6	12		27
	(M 22)	38		31.5		18		26.5	1	1.6	13.5		30
M 24	41	33.5	19	28.5	1	2	14.5	32					