

Plain washers — Large series —

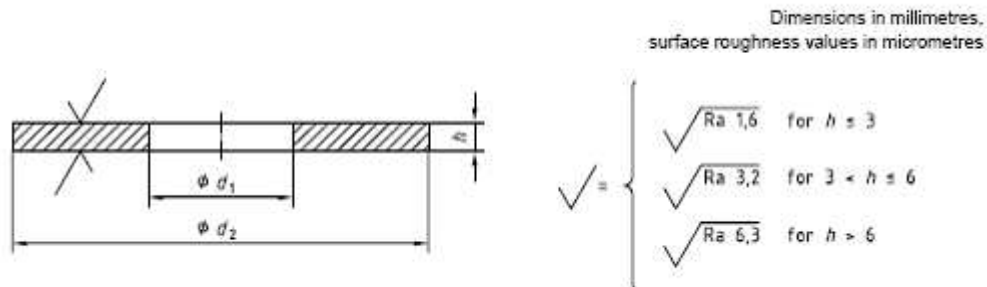
Part 1:
Product grade A

Table 1 — Preferred dimensions

Dimensions in millimetres

| Nominal size (Nominal thread diameter, d) | Clearance hole | | Outside diameter | | Thickness | | |
|---|----------------|---------------|------------------|---------------|-----------|-------------|------|
| | nom. (min.) | d_1 max. | nom. (max.) | d_2 min. | nom. | h max. | min. |
| 3 | 3,20 | 3,38 | 9,00 | 8,64 | 0,8 | 0,9 | 0,7 |
| 4 | 4,30 | 4,48 | 12,00 | 11,57 | 1 | 1,1 | 0,9 |
| 5 | 5,30 | 5,48 | 15,00 | 14,57 | 1 | 1,1 | 0,9 |
| 6 | 6,40 | 6,62 | 18,00 | 17,57 | 1,6 | 1,8 | 1,4 |
| 8 | 8,40 | 8,62 | 24,00 | 23,48 | 2 | 2,2 | 1,8 |
| 10 | 10,50 | 10,77 | 30,00 | 29,48 | 2,5 | 2,7 | 2,3 |
| 12 | 13,00 | 13,27 | 37,00 | 36,38 | 3 | 3,3 | 2,7 |
| 16 | 17,00 | 17,27 | 50,00 | 49,38 | 3 | 3,3 | 2,7 |
| 20 | 21,00 | 21,33 | 60,00 | 59,28 | 4 | 4,3 | 3,7 |
| 24 | 25,00 | 25,52 | 72,0 | 70,8 | 5 | 5,6 | 4,4 |
| 30 | 33,00 | 33,62 | 92,0 | 90,6 | 6 | 6,6 | 5,4 |
| 36 | 39,00 | 39,62 | 110,0 | 108,6 | 8 | 9 | 7 |

Table 3 — Specifications and International Standards of reference

| Material ^a | Steel | | Stainless steel | | |
|---|--|------------------|---------------------|---|------------------|
| | Grade ^b | | A2 | F1 | C1 |
| | International Standard | | A4 | | C4 |
| Mechanical properties | Hardness class | 200 HV | 300 HV ^c | | 200 HV |
| | Hardness range ^d | 200 HV to 300 HV | 300 HV to 370 HV | | 200 HV to 300 HV |
| Tolerances | Product grade | A | | | |
| | International Standard | ISO 4759-3 | | | |
| Surface finish | <p>Plain; i.e. washers to be supplied in natural finish, treated with a protective lubricant or with other coatings as agreed by customer and supplier.</p> <p>Requirements for electroplating covered in ISO 4042.</p> <p>Requirements for non-electrolytically applied zinc flake coatings covered in ISO 10683.</p> <p>For hardened and tempered washers, appropriate plating or coating processes should be employed to avoid hydrogen embrittlement. When washers are electroplated or phosphated, they shall be suitably treated immediately after plating or coating to obviate detrimental hydrogen embrittlement.</p> <p>All tolerances shall apply prior to the application of a plating or coating.</p> | | | <p>Plain; i.e. washers shall be supplied in natural finish.</p> | |
| Workmanship | Parts shall be free of irregularities or detrimental defects. No protruding burrs shall appear on the washer. | | | | |
| Acceptability | Acceptance procedure covered in ISO 3289. | | | | |
| <p>^a Other metallic materials as agreed between customer and supplier.</p> <p>^b Related to chemical composition only.</p> <p>^c Hardened and tempered.</p> <p>^d Hardness testing according to ISO 6507-1. Test force: HV 10 for nominal thickness $0,6 < h \leq 1,2$ mm; HV 30 for nominal thickness $h > 1,2$ mm.</p> | | | | | |