


六角穴付き止めねじ

Hexagon socket set screws

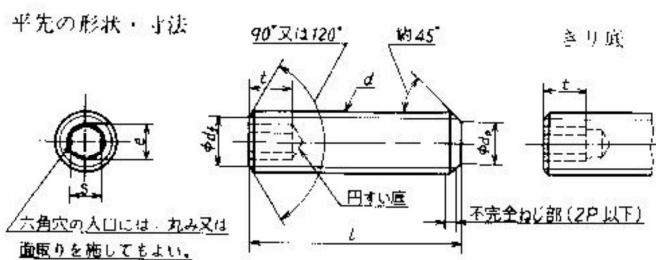

| ねじの呼び (d) | | M1.6 | M2 | M2.5 | M3 | M4 | M5 | M6 | M8 | M10 | M12 | M16 | M20 | M24 | |
|----------------|-----------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|--------|--------|----|
| ピッチ (p) | | 0.35 | 0.4 | 0.45 | 0.5 | 0.7 | 0.8 | 1 | 1.25 | 1.5 | 1.75 | 2 | 2.5 | 3 | |
| d _r | | | | | | | | | | | | | | | |
| e | 最小 | 0.803 | 1.003 | 1.427 | 1.73 | 2.3 | 2.87 | 3.44 | 4.58 | 5.72 | 6.86 | 9.15 | 11.43 | 13.72 | |
| | 呼び (基準寸法) | 0.7 | 0.9 | 1.3 | 1.5 | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | |
| s | 最小 | 0.711 | 0.889 | 1.27 | 1.52 | 2.02 | 2.52 | 3.02 | 4.02 | 5.02 | 6.02 | 8.025 | 10.25 | 12.032 | |
| | 最大 | 0.724 | 0.902 | 1.295 | 1.545 | 2.045 | 2.56 | 3.071 | 4.084 | 5.084 | 6.095 | 8.115 | 10.115 | 12.142 | |
| t | 最小 | 1 欄 | 0.7 | 0.8 | 1.2 | 1.2 | 1.5 | 2 | 2 | 3 | 4 | 4.8 | 6.4 | 8 | 10 |
| | | 2 欄 | 1.5 | 1.7 | 2 | 2 | 2.5 | 3 | 3.5 | 5 | 6 | 8 | 10 | 12 | 15 |